TOMEEX

SUOAN Group

TOMMUR INDUSTRY SHANGHAI CO.,LTD

上海天卯实业有限公司







http://www.tomeex.com

公司简介
Company profile

Tommur Industry Shanghai Co., Ltd. was established in 2004 and is headquartered in Pudong New Area, Shanghai. The company's main products are plastic products,irrigation product, faucets, valves,and.

In addition, we can also provide one-stop services such as customization, molding, and processing. In the past 10 years, we have focused on the development of the industry. With strong economic strength, advanced and standardized management systems, and a loyal and trustworthy corporate image, we have developed into a group company that integrates leading production of plastic valves, domestic and foreign trade, and e-commerce operations.

At present, there are four direct investment and equity companies: Tommur Industry Shanghai Co., Ltd., Shanghai Tianmao Industrial Co., Ltd., Pera Industry Shanghai CO.,LTD , and Yuhuan Painuo Plastic Products Co., Ltd. After nearly 20 years of development, we have invested and built two production bases in Shanghai and Yuhuan.

And we have established long-term and stable cooperative relationships with more than 30 domestic suppliers, with independent brands. Our products have obtained 25 national patents, including 10 utility model patents and 3 invention patents, as well as ROHS, CE, LFGB, UL, FDA, ISO, NSF and other certifications. Currently, 90% of our products are sold abroad and exported to more than 150 countries worldwide

.






1
安 全 第 一


UVA甬华

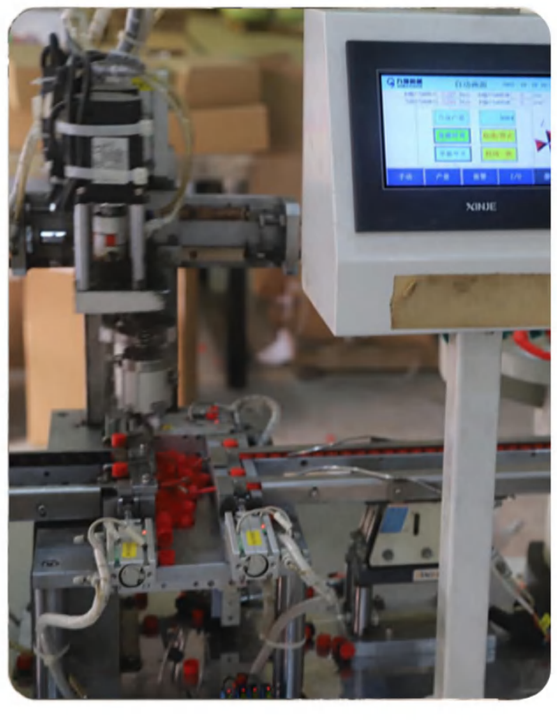




PERA
TOMEX
上海天卑实业有限公司
TOMMUR INDUSTRY SHANGHAI CO.,LTD



Tommur

CONTENTS

HDPE PIPES……1
PP COMPRESSION FITTINGS…… 2-3
PP COMPRESSION BALL VALVES…… 4
PVC BLACK VALVES…… 4
SADDLE CLAMPS…… 4
DRIP TAPES……5
MINI VALVES…… 6-11
DRIP TAPE FITTINGS…… 12-13
SPRAY HOSES……14
LAYFLAT HOSES……15
SPRINKLERS…… 16-26
MICRO SPRINKLERS…… 27-34
POP-UP SPRAYERS SERIES…… 35
POP-UP SPRAYERS SERIES FITTINGS……36-38
STACKS…… 39
DRIPPERS…… 40-42
FILTERS…… 43
WATER-INTAKE VALVES……43
QUICK COUPLING VALVES…… 44
VENTURI INJECTORS…… 44
TOOLS……44
VALVE BOX……44

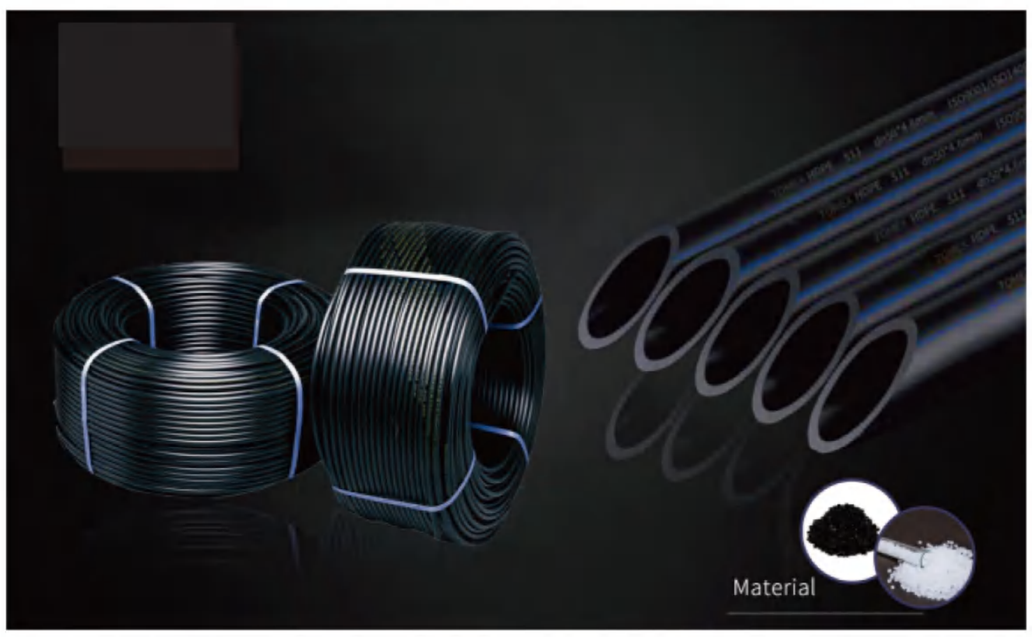

HDPE PIPE

PE1100

The specifications of our HDPE pipe meet the requirements of GB T13663-2000 and GB/T136632-2005 standards, The hygienic performance conforms to the GB/T17219 standard and the relevant hygienic sevaluation regulations of the Ministry of Health. It has the characteristics of good flexibility, strong corrosion resistance, light weight, and excellent impact resistance. The connection of pipes and fittings can be connected by hot-melt socket, butt fusion and electric fusion, making the pipes and fittings are melted together, and the system is safe and reliable, and with low construction cost. Vigorously promote PE pipelines, is in line with guidelines of the Ministry of Construction for the development of chemical building materials, and meet the development needs of peoples living standards.

Pressure OD （mm）	PN0.6MPa DSR 26 Thickness （mm）	PN0.8MPa DSR 21 Thickness （mm）	PN1.0MPa DSR 17 Thickness （mm）	PN1.25MPa DSR 13.6 Thickness	PN1.6MPa DSR 11 Thickness （mm）
16					1.2
20					2.3
25					2.3
32					3
40					3.7
50					4.6
63			3.7	4.7	5.8
75			4.5	5.6	6.8
90		4.3	5.4	6.7	8.2
110	4.2	5.3	6.6	8.1	10
125	4.8	6	7.4	9.2	11.4
140	5.4	6.7	8.3	10.3	12.7
160	6.2	7.7	9.5	11.8	14.6
180	6.9	8.6	10.7	13.3	16.4
200	7.7	9.6	11.9	14.7	18.2
225	8.6	10.8	13.4	16.6	20.5
250	9.6	11.9	14.8	18.4	22.7
280	10.7	13.4	16.6	20.6	25.4
315	12.1	15	18.7	23.2	28.6
355	13.6	16.9	21.1	26.1	32.2
400	15.3	19.1	23.7	29.4	36.3
450	17.2	21.5	26.7	33.1	40.9
500	19.1	23.9	29.7	36.8	45.4
560	21.4	26.7	33.2	41.2	50.8
630	24.1	30	37.4	46.3	57.2
710	27.2	33.9	42.1	52.2	
800	30.6	38.1	47.4	58.8	
900	34.4	42.9	53.3		
1000	38.2	47.7	59.3		
1200	45.9	57.2			



FEATURES

- Because HDPE molecules have no polarity, they have good chemical stability. With the exception of a few strong oxidants, most chemical mediators do not destroy them. It does not breed bacteria and does not scale, and its circulation area will not decrease with the increase of operating time. It is an environmentally friendly product.
- Good connection strength (mainly hot-melt butt socket) such as:few joints, no leakage
- Convenient construction:Thanks to the light weight of HDPE pipe, it is convenient to carry and connect, so the construction is fast and the maintenance work is simple In the case of tight construction period and poor construction conditions, its advantages are more obvious
- The small friction coefficient and the large flow rate:the pipeline use HDPE as the material can pass a larger flow rate than other pipes of the same caliber. In other words, under the same requirements, HDPE pipes with relatively small diameter can be used.
  Good flexibility and a certain degree of deflection (22. 5)。HDPE pipe can be slightly deflected in the axial direction, and is not affected by the uneven settlement of the ground to a certain extent; it can be directly laid in the slightly uneven groove without using pipe fittings, etc.
- Good low temperature resistance:the embrittlement temperature of impact resistance is (-70"C)，no special protection measures are needed when constructing under low temperature conditions (below-30"C)，and construction is convenient in winter. Moreover, polyethylene pipes have good impact resistance, and under a water hammer 2.5times, the nominal pressure will not cause any damage to the pipes
- Good low temperature resistance:the embrittlement temperature of impact resistance is (-70"C)，no special protection measures are needed when constructing under low temperature conditions (below-30"C)，and construction is convenient in winter. Moreover, polyethylene pipes have good impact resistance, and under a water hammer 2.5times, the nominal pressure will not cause any damage to the pipes
- Excellent wear resistance:It has been experimentally proved that the wear resistance of HDPE is even higher several times than that of copper pipes.
- Strong pressure resistance:Compared with other pipes, it has obvious advantages





Coupling

TI01001

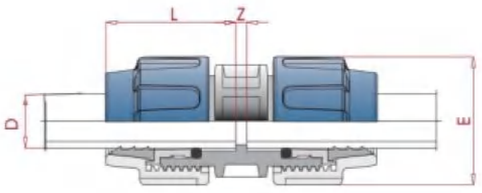

Size(mm)	D(mm)	DN	PN	L(mm)	Z(mm)	E(mm)
20*20	20	15	16	49	4	44
25*25	25	20	16	58	4	56
32*32	32	25	16	81	4	66
40*40	40	32	16	92	5	80
50*50	50	40	16	108	8	94
63*63	63	50	16	125	8	114
75*75	75	65	13	140	10	130
90*90	90	80	13	148	10	153
110*110	110	100	13	167	12	181





Elbow

TI01002

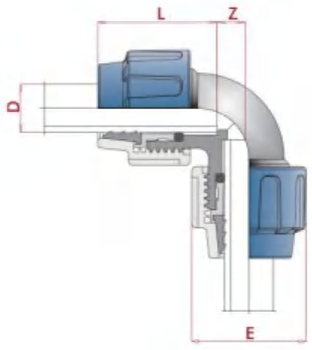

Size(mm)	D(mm)	DN	PN	L(mm)	Z(mm)	E(mm)
20*20	20	15	16	49	13	44
25*25	25	20	16	58	16	56
32*32	32	25	16	81	18	66
40*40	40	32	16	92	24	80
50*50	50	40	16	108	28	94
63*63	63	50	16	125	32	114
75*75	75	65	13	140	37	130
90*90	90	80	13	156	53	153
110*110	110	100	13	176	63	181



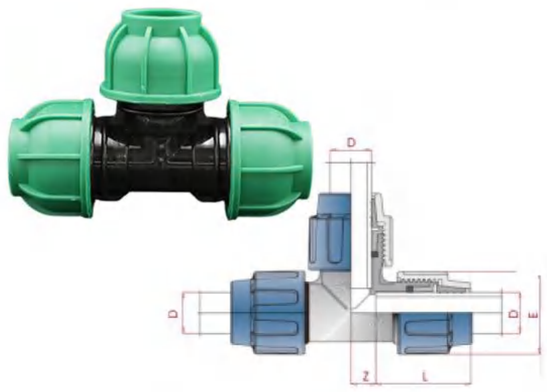

Tee

TI01003

Size(mm)	D(mm)	DN	PN	L(mm)	Z(mm)	E(mm)
20*20*20	20	15	16	49	13	44
25*25*25	25	20	16	58	16	56
32*32*32	32	25	16	81	18	66
40*40*40	40	32	16	92	24	80
50*50*50	50	40	16	108	28	94
63*63*63	63	50	16	125	32	114
75*75*75	75	65	10	140	41	130
90*90*90	90	80	10	156	53	153
110*110*110	110	100	10	176	63	181





Reducer

TI01004

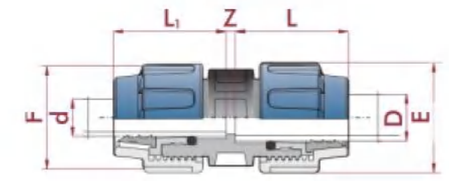

Size(mm)	D*G(mm)	DN	PN	L(mm)	L1(mm)	Z(mm)	E(mm)	F(mm)
25*20	25*20	15	16	58	49	4	56	44
32*20	32*20	15	16	81	49	5	66	44
32*25	32*25	20	16	81	58	4	66	56
40*25	40*25	20	16	92	58	12	80	56
40*32	40*32	25	16	92	81	4	80	66
50*32	50*32	25	16	108	81	5	94	66
50*40	50*40	32	16	108	92	5	94	80
63*50	63*50	40	16	125	108	8	114	94
75*63	75*63	50	10	140	125	15	130	114
90*63	90*63	65	10	148	116	6	153	114
90*75	90*75	80	10	148	141	6	153	130
110*90	110*90	100	10	167	148	15	180	153





FEMALE ADAPTOR

TI01005

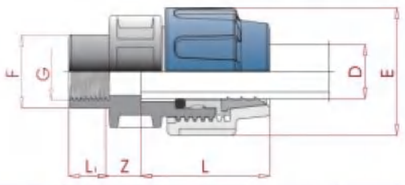

Size(mm)	D*G(mm)	PN	L(mm)	L1(mm)	Z(mm)	E(mm)	F(mm)
20*1/2″	20*1/2″	10	49	16	11	44	27
20*3/4″	20*3/4″	10	49	19	11	44	34
25*1/2″	25*1/2″	10	58	16	12	56	27
25*3/4″	25*3/4″	10	58	19	12	56	34
25*1″	25*1″	10	53	22	12	56	41
32*3/4″	32*3/4″	10	81	19	15	66	34
32*1″	32*1″	10	81	22	15	66	41
40*1″	40*1″	10	92	22	17	80	41
40*1 1/4″	40*1 1/4″	10	92	24	17	80	52
50*1 1/4″	50*1 1/4″	10	108	24	17	94	52
50*1 1/2″	50*1 1/2″	10	108	24	17	94	61
50*2″	50*2″	10	108	28	17	94	76
63*1 1/2″	63*1 1/2″	10	125	28	19	114	61
63*2″	63*2″	10	125	28	19	114	76
75*2″	75*2″	10	140	28	39	130	76
75*2 1/2″	75*2 1/2″	10	140	33	39	130	88
75*3″	75*3″	10	140	33	39	130	113
90*2″	90*2″	10	148	32	8	153	87
90*2 1/2″	90*2 1/2″	10	148	32	10	153	106
90*3″	90*3″	10	148	34	8	153	113
90*4″	90*4″	10	148	38	29	153	135
110*2″	110*2″	10	167	32	14	181	87
110*3″	110*3″	10	167	34	12	181	119
110*4″	110*4″	10	167	38	8	181	144





MALE ADAPTOR

TI01006



Size(mm)	D*G(mm)	DN	PN	L(mm)	L1(mm)	Z(mm)	E(mm)
20*1/2″	20*1/2″	15*15	10	49	14	14	44
20*3/4″	20*3/4″	15*20	10	49	16	14	44
20*1″	20*1″	15*25	10	49	19	14	4
25*1/2″	25*1/2″	20*15	10	58	14	15	56
25*3/4″	25*3/4″	20*20	10	58	16	15	56
25*1″	25*1″	20*25	10	58	19	15	56
32*3/4″	32*3/4″	25*20	10	81	16	16	66
32*1″	32*1″	25*25	10	81	19	16	66
32*1 1/4″	32*1 1/4″	25*32	10	81	21	16	66
40*1″	40*1″	32*25	10	92	21	22	80
40*1 1/4″	40*1 1/4″	32*32	10	92	21	22	80
40*1 1/2″	40*1 1/2″	32*40	10	92	21	22	80
50*1″	50*1″	40*25	10	92	21	22	94
50*1 1/4″	50*1 1/4″	40*32	10	108	21	23	94
50*1 1/2″	50*1 1/2″	40*40	10	108	21	23	94
50*2″	50*2″	40*50	10	108	26	23	94
63*1 1/2″	63*1 1/2″	50*40	10	125	21	25	114
63*2″	63*2″	50*50	10	125	26	25	114
75*2″	75*2″	65*50	10	140	26	39	130
75*2 1/2″	75*2 1/2″	65*65	10	140	30	39	130
75*3″	75*3″	65*80	10	140	33	39	130
90*2″	90*2″	80*50	10	148	30	30.5	153
90*2 1/2″	90*2 1/2″	80*65	10	148	32	30	153
90*3″	90*3″	80*80	10	148	34	30	153
90*4″	90*4″	80*100	10	148	39	29	153
110*2″	110*2″	100*50	10	167	30	31	181
110*3″	110*3″	100*80	10	167	35	31	181
110*4″	110*4″	100*100	10	167	38	31	181

TOMEEX



Reducing Tee

TI01007

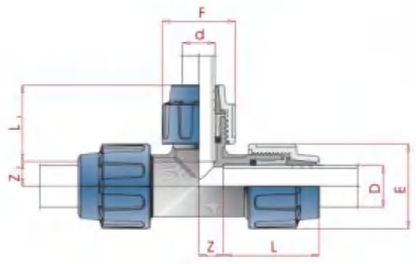

Size(mm)	D*d*D(mm)	DN	PN	L(mm)	L1(mm)	Z(mm)	Z1(mm)	E(mm)	F(mm)
25*20*25	25*20*25	15	16	58	49	16	13	56	44
32*25*32	32*25*32	20	16	81	58	18	16	66	56
40*32*40	40*32*40	25	16	92	81	24	18	80	66
50*32*50	50*32*50	25	16	108	86	28	28	94	66
50*40*50	50*40*50	32	16	108	92	28	24	94	80
63*50*63	63*50*63	40	16	125	108	32	28	114	94
75*63*75	75*63*75	50	10	140	125	41	32	130	114
90*75*90	90*75*90	65	10	156	131	53	58	153	130
110*90*110	110*90*110	80	10	176	156	63	68	181	153



Female Elbow

TI01009

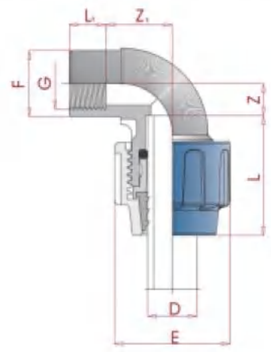

Size(mm)	D*G(mm)	PN	L(mm)	L1(mm)	Z(mm)	Z1(mm)	E(mm)	F(mm)
20*1/2″	20*1/2″	10	49	16	13	26	44	27
20*3/4″	20*3/4″	10	49	19	13	26	44	34
25*1/2″	25*1/2″	10	58	19	16	31	56	34
25*3/4″	25*3/4″	10	58	19	16	31	56	34
32*1/2″	32*1/2″	10	81	16	18	43	66	27
32*3/4″	32*3/4″	10	81	19	18	43	66	34
32*1″	32*1″	10	81	22	18	43	66	41
40*3/4″	40*3/4″	10	92	19	24	48	80	34
40*1″	40*1″	10	92	24	24	46	80	41
40*1-1/4″	40*1-1/4″	10	92	24	24	54	80	52
40*1-1/2″	40*1-1/2″	10	92	24	24	54	80	61
50*1-1/4″	50*1-1/4″	10	108	24	28	58	94	52
50*1-1/2″	50*1-1/2″	10	108	24	28	58	94	61
50*2″	50*2″	10	108	28	28	58	94	76
63*1-1/4″	63*1-1/4″	10	125	24	32	70	114	52
63*1-1/2″	63*1-1/2″	10	125	28	32	68	114	58
63*2″	63*2″	10	125	28	32	67	114	76
75*2″	75*2″	10	140	28	1	83	130	76
75*2-1/2″	75*2-1/2″	10	140	33	41	83	130	88
90*3″	90*3″	10	148	35	53	55	153	109
90*4″	90*4″	10	148	36	53	89	153	132
110*4″	110*4″	10	167	38	63	63	181	135

Female Tee

TI01011

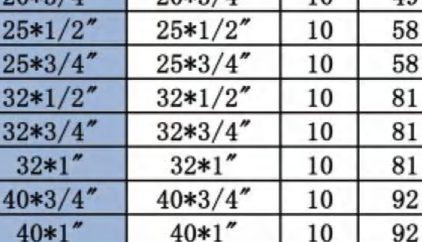

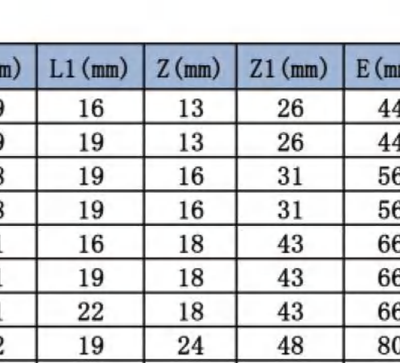

Size(mm)	D*G*D(mm)	PN	L(mm)	L1(mm)	Z(mm)	Z1(mm)	E(mm)	F(mm)
20*1/2″*20	20*1/2″*20	10	49	16	13	26	44	27
20*3/4″*20	20*3/4″*20	10	49	19	13	26	44	34
25*1/2″*25	25*1/2″*25	10	58	16	16	31	56	27
25*3/4″*25	25*3/4″*25	10	58	19	19	31	56	34
25*1″*25	25*1″*25	10	58	24	19	34	56	47
32*1/2″32	32*1/2″32	10	81	16	18	43	66	27
32*3/4″*32	32*3/4″*32	10	81	19	18	43	66	34
32*1″*32	32*1″*32	10	81	22	18	43	66	41
40*1 1/4″*40	40*1 1/4″*40	10	92	24	24	54	80	52
50*1″*50	50*1″*50	10	108	24	28	50	94	42
50*1 1/2″*50	50*1 1/2″*50	10	108	24	28	58	94	61
50*2″*50	50*2″*50	10	140	28	28	58	94	76
63*1″*63″	63*1″*63″	10	125	24	32	62	114	42
63*1 1/2″*63	63*1 1/2″*63	10	125	28	32	67	114	58
63*2″*63	63*2″*63	10	125	28	32	67	114	76
75*2 1/2″*75	75*2 1/2″*75	10	140	33	41	83	130	88
90*3″*90	90*3″*90	10	156	35	53	55	153	109
110*3″*110	110*3″*110	10	176	36	63	69	181	114
110*4″*110	110*4″*110	10	176	40	63	61	181	114



MALE ELBOW

TI01008



Size(mm)	D*G(mm)	DN	PN	L(mm)	L1(mm)	Z(mm)	Z1(mm)	E(mm)	F(mm)
20*1/2″	20*1/2″	15*15	10	49	14	13	26	44	27
20*3/4″	20*3/4″	15*20	10	49	16	13	26	44	30
25*1/2″	25*1/2″	20*15	10	58	14	16	34	56	27
25*3/4″	25*3/4″	20*20	10	58	16	16	34	56	30
32*1/2″	32*1/2″	25*15	10	81	14	18	34	66	27
32*3/4″	32*3/4″	25*20	10	81	16	18	34	66	30
32*1″	32*1″	25*25	10	81	19	18	45	66	36
40*1 1/4″	40*1 1/4″	32*32	10	92	21	24	59	80	48
40*1 1/2″	40*1 1/2″	32*40	10	92	21	24	59	80	52
50*1 1/4″	50*1 1/4″	40*32	10	108	21	28	68	94	48
50*1 1/2″	50*1 1/2″	40*40	10	108	21	28	68	94	52
50*2″	50*2″	40*50	10	108	26	28	68	94	66
63*1 1/4″	63*1 1/4″	50*32	10	125	24	32	71	114	48
63*1 1/2″	63*1 1/2″	50*40	10	125	24	32	71	114	52
63*2″	63*2″	50*50	10	125	26	32	78	114	66
75*2 1/2″	75*2 1/2″	65*65	10	140	30	41	83	130	82
90*3″	90*3″	80*80	10	156	35	53	77	153	113
90*4″	90*4″	100*100	10	156	39	53	77	153	113
110*4″	110*4″	110*110	10	176	40	63	90	181	135



Male Tee

TI01010

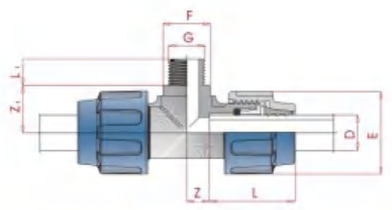

Size(mm)	D*G*D(mm)	DN	PN	L(mm)	L1(mm)	Z(mm)	Z1(mm)	E(mm)	F(mm)
20*1/2″*20	20*1/2″*20	15*15	10	49	14	13	26	44	27
20*3/4″*20	20*3/4″*20	15*20	10	49	16	13	26	44	30
25*1/2″*25	25*1/2″*25	20*15	10	58	14	16	34	56	27
25*3/4″*25	25*3/4″*25	20*20	10	58	16	16	34	56	30
32*1/2″32	32*1/2″32	25*15	10	81	14	18	45	66	27
32*1″*32	32*1″*32	25*25	10	81	19	18	45	66	36
40*1-1/4″*40	40*1 1/4″*40	32*32	10	92	21	24	59	80	48
40*1-1/2″*40	40*1 1/2″*40	32*40	10	92	21	24	59	80	52
50*1-1/2″*50	50*1 1/2″*50	40*40	10	108	21	28	68	94	52
63*2″*63	63*2″*63	50*50	10	125	26	32	78	114	66
75*2-1/2″*75	75*2 1/2″*75	65*65	10	140	30	41	83	130	82
90*3″*90	90*3″*90	80*80	10	156	35	53	77	153	117
90*4″*90	90*4″*90	80*110	10	156	39	53	77	153	117
110*4″*110	110*4″*110	110*110	10	176	40	63	90	181	142

End Cap

TI01012

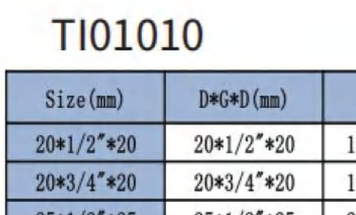





Size(mm)	D(mm)	DN	PN	L(mm)	Z(mm)	E(mm)
20	20	15	16	49	14	44
25	25	20	16	58	15	56
32	32	25	16	81	16	66
40	40	32	16	92	22	80
50	50	40	16	108	23	94
63	63	50	16	125	25	114
75	75	65	13	140	40	130
90	90	80	13	148	28	153
110	110	100	13	167	31	181



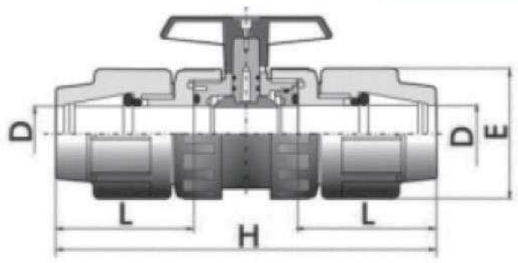

PP DOUNLE UNION BALL VALVE

TI01013

Size (mm)	NPT (mm)	BSPT (mm)	JIS (mm)	BS (mm)	ANSI (mm)	DIN (mm)	D (mm)	D1 (mm)	I (mm)	L (mm)
(1/2")	14	14	22	22	21.34	20	31	43.7	31	137
(3/4")	14	14	26	26	26.67	25	35.5	43.7	32.5	141
(1")	11.5	11	32	34	33.4	32	41	55.1	35	148
(1-1/4")	11.5	11	38	42	42.16	40	50	79	47	195
(1-1/2")	11.5	11	48	48	48.26	50	63	92	41	205
(2")	11.5	11	60	60	60.33	60	75	105	52	226



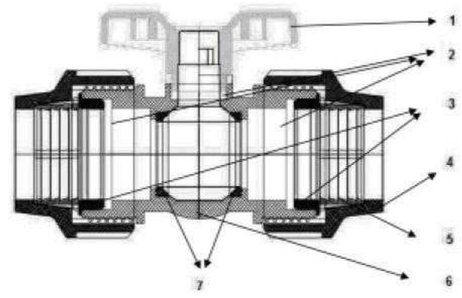

PP BALL VALVE

TI01014

Size		Watwe ID (mm)	Nut ID (mm)	Cap ID (mm)	Depth (mm)	Hither	Handle
mm	inch	DN				H (mm)	T (mm)
ϕ20	1/2"	DN15	21	21	14.5	69	68
ϕ25	3/4"	DN20	26	26	14	82	78
ϕ32	1"	DN25	33	33	14	91	92
ϕ40	1-1/4"	DN32	41	41	19	107	100
ϕ50	1-1/2"	DN40	51.5	51.5	19	128.2	122
ϕ63	2"	DN50	64.5	64.5	20	149	140
ϕ75	2-1/2"	DN65	77	77	27.5	167.3	140
ϕ90	3"	DN80	92.6	92.6	45	193.3	206
ϕ	4"	DN100	113.5	113.5	56.6	220.8	248



PP BALL VALVE

TI01015

Size		Watwe ID (mm)	Nut ID (mm)	Cap ID (mm)	Depth (mm)	Hither	Handle
mm	inch	DN				H (mm)	T (mm)
ϕ20	1/2"	DN15	21	21	14.5	69	68
ϕ25	3/4"	DN20	26	26	14	82	78
ϕ32	1"	DN25	33	33	14	91	92
ϕ40	1-1/4"	DN32	41	41	19	107	100
ϕ50	1-1/2"	DN40	51.5	51.5	19	128.2	122
ϕ63	2"	DN50	64.5	64.5	20	149	140
ϕ75	2-1/2"	DN65	77	77	27.5	167.3	140
ϕ90	3"	DN80	92.6	92.6	45	193.3	206
ϕ	4"	DN100	113.5	113.5	56.6	220.8	248



END CAP WITH FLANGE

TI01016





F/M UNION BALL VALVE

TI01016



SADDLE CALMP

TI01018







SADDLE CALMP

TI01019



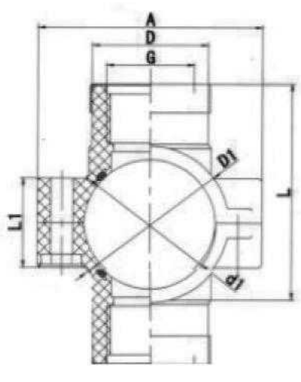

SADDLE CALMP

TI01020

Drip Tape with Inner Flat Emitter

PE1101

It can be used to irrigate cotton, sugarcane and vegetables (such as tomato, cucumber, strawberry, etc.) to meet the water and fertilizer requirements of plant growth, and achieve high yield, high quality and high efficiency
Drip irrigation is one of the most effective water-saving irrigation methods in arid and water deficient areas. Its water utilization rate can reach 95%, and drip irrigation has higher water-saving and yield increasing effect than sprinkler irrigation. At the same time, it can combine with fertilization to increase fertilizer efficiency more than twice.



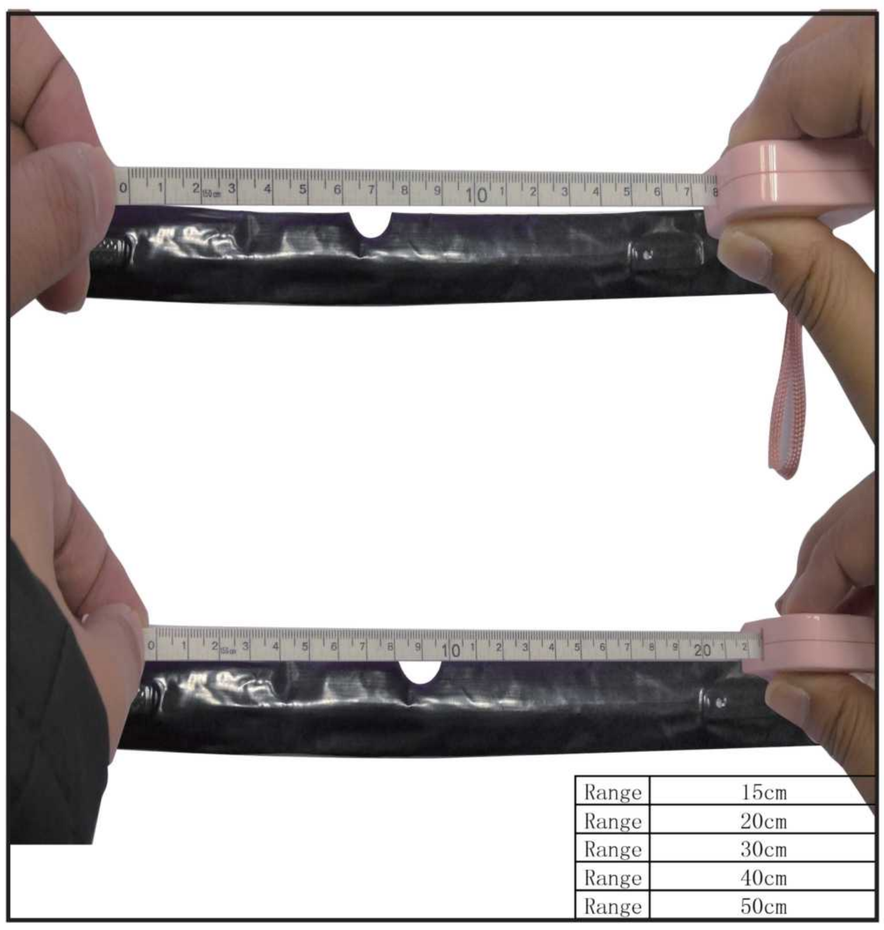

Range	15cm
Range	20cm
Range	30cm
Range	40cm
Range	50cm







FEATURES

- Drip uniformity: the emitter adopts imported mold and imported raw materials, and scientific and reasonable groove design ensures uniform and stable emitter flow
- The dripper is not easy to be clogged: the drip irrigation with inner patch has a self filtering window, which has good anti clogging performance.
- Long service life: reasonable proportioning of raw materials and anti-aging additives, which greatly extend the life of products.
- The dripper is closely bonded with the pipe wall: the dripper is embedded in the pipe with good integrity.
- The laying distance is longer than that of the inner cylindrical drip irrigation pipe.
- The distance between drippers can be set arbitrarily according to the needs of users.

Labyrinth Drip Tape

PE1102

Drip irrigation pipe is one of the important irrigation methods in drip irrigation system. According to the requirements of crop water demand, the nutrients required by crops are evenly and slowly dripped into the root soil of crops through the low-pressure pipe system and the irrigator installed on the capillary. Drip irrigation will not damage the soil structure.







FEATURES

- Labyrinth dripper is used. The emitter and the inner wall of the tube are fused to form a closed flow channel. The water flow is in a plain flow state, and the uniformity of effluent is ⩾ 85%
- High precision mould and imported raw materials are selected for drip production. The design of double outlet hole can reduce the micro particles in the soil and the roots of crops can enter into the dripper; the self-cleaning performance and anti blocking ability are strong
- Drip irrigation pipe selects new LDPE material and adds anti-aging agent and ultraviolet absorber. It has high strength, corrosion resistance and anti-aging.
- Drip irrigation pipe is mainly used in greenhouse and field, vegetables, fruit trees, grapes, flowers and other economic crops, which can save 50% water and more than 50% fertilizer
- 1. L (h-2bl / h) can be selected according to different water requirements of crops
- 0.5m-1.0m pipe wall thickness can meet the needs of different Lake Irrigation environment



MV01-001
Mini valve
16,20

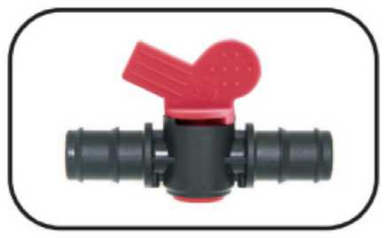



MV01-002
Mini valve
16

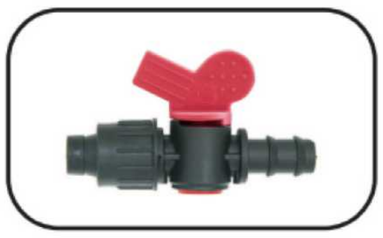



MV01-003
Mini valve
16

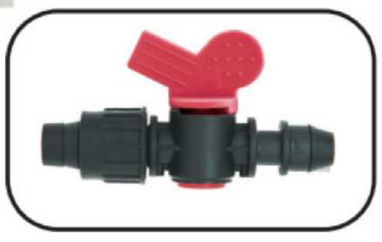



MV01-004
Mini valve
16





MV01-005
Mini valve
16,20

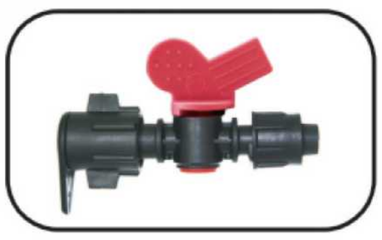

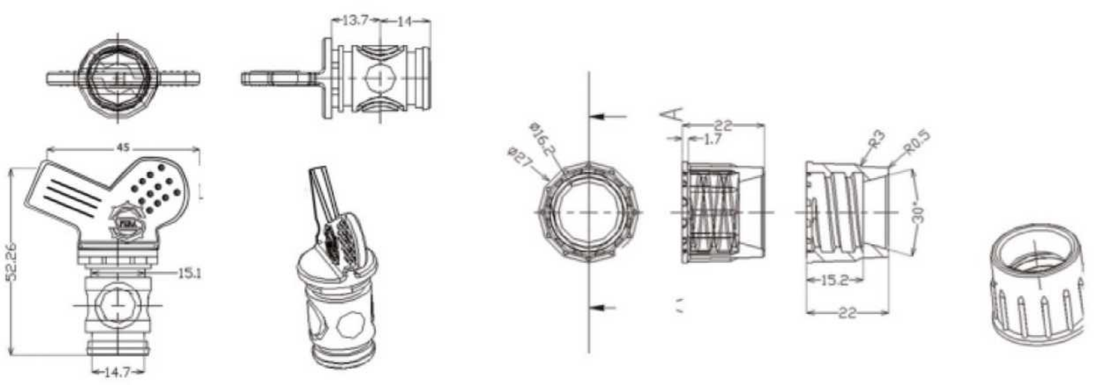

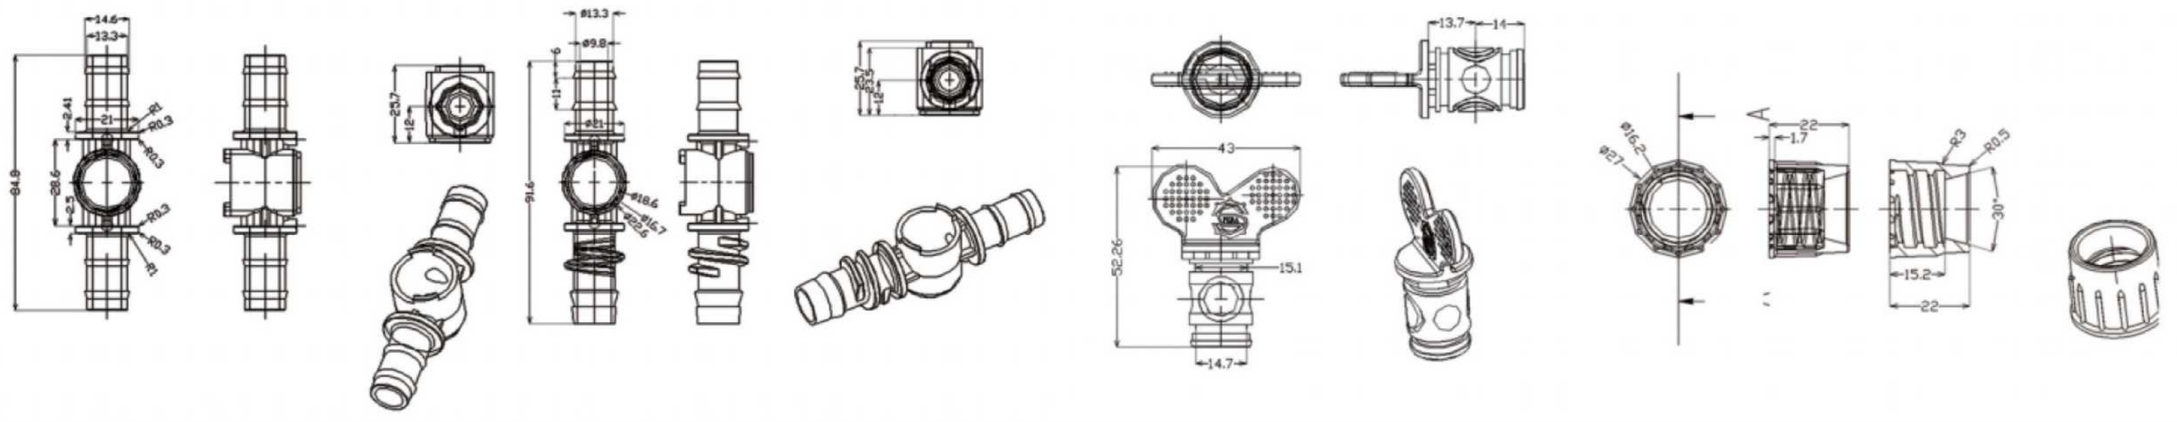



MV02-001

ϕ 16x16mm
ϕ 20x20mm
ϕ 25x25mm

ϕ 4x4mm
ϕ 8x8mm
ϕ 12x12mm



MV02-002

ϕ 20x16mm
ϕ 25x20mm



MV02-003

ϕ 16x12mm
ϕ 20x12mm



MV02-004

ϕ 16x1/2″
ϕ 16x3/2″
ϕ 20x1/2″
ϕ 20x3/4″



MV02-005

ϕ 16x16mm
ϕ 16x13mm



MV02-006

ϕ 16x1/2″
ϕ 16x3/2″



MV02-007

ϕ 16x16mm



MV02-008

ϕ 16x16mm(long)
ϕ 16x16mm(short)



MV02-009

ϕ 16x16mm



MV02-010

ϕ 16x16mm



MV02-012

ϕ 16x16mm



MV02-013

ϕ 16x16mm



MV02-017

ϕ 1/2x1/2″
ϕ 3/4x3/4″



MV02-022

ϕ 20x20mm



MV02-023

ϕ 20x20mm



MV02-024

ϕ 20x1/2″



MV02-027

ϕ 25x3/4″
ϕ 32″x1″



MV02-028

ϕ 25x25mm
ϕ 32x32mm

Color Customised

MV02-001

ϕ 16x16mm ϕ4x4mm
ϕ 20x20mm ϕ8x8mm
ϕ 25x25mm ϕ12x12mm



MV02-021

ϕ 16x13mm
ϕ 20x16mm



MV02-022

ϕ 20x16mm

MV02-004







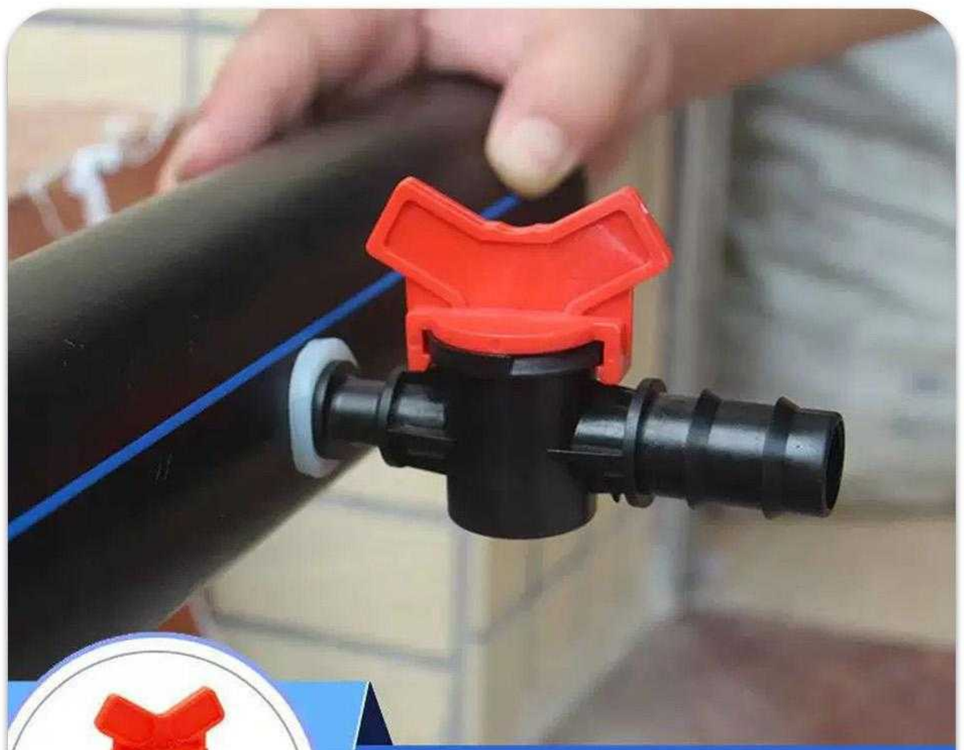



MV02-003

MINI VALVES



MV02-101

ϕ 16

ϕ 20



MV02-102

ϕ 20x16mm

ϕ 25x20mm



MV02-103

ϕ 16x1/2"

ϕ 16x3/4"

ϕ 20x1/2"

ϕ 20x3/4"



MV02-104

ϕ 16



MV02-105

ϕ 16x17mm



MV02-106

ϕ 16x17mm



TOMEEX



MV03-001

ϕ 16x16mm
ϕ 20x20mm
ϕ 25x25mm



MV03-002

ϕ 16mmx1/2″ ϕ 16mmx3/4″
ϕ 20mmx1/2″ ϕ 20mmx3/4″
ϕ 25mmx1/2″ ϕ 25mmx3/4″



MV03-003

ϕ 16mmx1/2″



MV03-004

ϕ 20x25mm



MV03-005

ϕ 16x12mm



MV03-006

ϕ 16



MV03-007

ϕ 16x1/2″mm
ϕ 16x3/4″mm



MV03-008

ϕ 17x16mm



MV03-009

ϕ 17x16mm



MV03-010

ϕ 16



MV03-011

ϕ 12x16mm



MV03-012

ϕ 16mmx1/2″



MV03-013

ϕ 16mmx1/2″

DRIP TAPE FITTINGS



A1301-001

Plug

ϕ 16mm
ϕ 20mm
ϕ 25xmm



A1301-002

Couping

ϕ 16x16mm
ϕ 20x20mm
ϕ 25x25mm



A1301-003

Reducing Couping

ϕ 20x16mm



A1301-004

Male Adaptor

ϕ 16x1/2″ mm
ϕ 16x3/4″ mm
ϕ 20x1/2″ mm
ϕ 20x3/4″ mm



A1301-005

Adaptor

ϕ 16mm
ϕ 20mm
ϕ 25xmm



A1301-006

Male Tee

ϕ 16x1/2″ mm
ϕ 16x3/4″ mm
ϕ 20x1/2″ mm
ϕ 20x3/4″ mm



A1301-007

Tee

ϕ 16x16mm
ϕ 20x20mm
ϕ 25x25mm



A1301-008

Male elbow

ϕ 16x16mm
ϕ 20x20mm
ϕ 25x25mm



A1301-009

Plug

ϕ 16mm
ϕ 20mm



A1301-010

Female Adaptor

ϕ 16x1/2″ mm
ϕ 16x3/4″ mm
ϕ 20x1/2″ mm
ϕ 20x3/4″ mm



A1301-011

Elbow

ϕ 16x16mm
ϕ 20x20mm
ϕ 25x25mm



TS03130.01

Coupling with double nuts

ϕ 16x16mm



TS03130.02

Coupling with single nut

ϕ 16x16mm



TS03130.03

Male Elbow single nut

ϕ 16x1/2″ mm



TS03130.04

Male Tee double nuts

ϕ 16x1/2″ mm

TOMEEX



A1302-001
Tee
DN17



A1302-002
Coupling
DN17X1/2″



A1302-003
Coupling
DN17



A1302-004
End Cap
DN17



A1302-005
Tee
DN17x16



A1302-006
Coupling
DN17x16



A1302-007
Coupling
DN17x6
DN17x12



A1302-008
Coupling
DN17



A1302-009
Coupling
DN17x16



A1302-010
Coupling
DN17



A1302-011
Coupling
DN17x1/2″



A1302-012
Coupling
DN17



A1302-013
Coupling
DN17x1/2″



A1302-014
Coupling
DN17x8



A1302-015
Coupling
DN17



A1302-016
Coupling
DN13x12



A1302-017
Coupling
DN17



A1302-018
Coupling
DN17x16



A1302-019
Coupling
DN17



A1302-020
Coupling
DN17



A1302-021
Coupling
DN17



A1302-022
Coupling
DN17x1/2″



A1302-023
Coupling
DN17

Spray Hose

PE1103

Mainly used as branch line in irrigation system. New style cylindrical wide flow path, smooth flow, self-rinse, Anti-clogging made of highest grade poly-ethylene resins with UV additives anti-aging and anti-corrosion additives which make it more durable the most efficient drip line, layout length can be longer









FEATURES

- Drip uniformity: the emitter adopts imported mold and imported raw materials, and scientific and reasonable groove design ensures uniform and stable emitter flow
- The micro spray belt is easy to install and use and easy to recycle. The laying distance of different types of micro spray tape is different, so the situation should be inquired carefully before use. The micro spray belt is light in weight and connected with the pipeline by the positive (negative) bus bypass, which is easy to install and remove and easy to
- Easy to move and store: special retractor can be used in the open field to make the micro spray belt easy to move, use and keep.
- When water and fertilizer are applied together, fertilization can be combined during irrigation. The liquid chemical fertilizer or chemical fertilizer dissolved in advance can be transported to the field with water through the matching fertilizer tank or fertilizer applicator at the head.
- The product has long service life, strong pressure and anti-aging ability.
- The anti blocking ability is strong, and the underground well water can not be filtered basically.
- Similar to drizzle irrigation crops, irrigation uniform, do not harm crops, maintain good soil properties. Improve the microclimate in the field, reduce the diseases and insect pests caused by excessive humidity of crops, and the effect is better after covering with plastic film.

TOMEEX

Layflat Hose

PE1104

High quality pressure resistant and durable sand suction hose is woven from high strength polyester filament. The inner and outer layers are coated with high quality synthetic fiber. With innovative style, scientific design, advanced technology and excellent quality, we can provide durable and high-quality products for users for a long time. It is suitable for the pump with the lift of 60m ~ 80m. The length of water delivery can be 1000m. The length of sand transport is about 100m. The length of 4-8in is the most suitable for sand pump. It can be equipped with mud pump, high-pressure spray gun and sand pump for agricultural irrigation, construction engineering drainage and mine water conveyance.











FEATURES

- Withstand voltage design is greater than 0.8 MPa, high voltage withstand
- The price is reasonable, the material is soft, the color is bright and lasting
- Environmental friendly PVC has no odor, non-toxic, environmental protection, and its service life can reach 4-6 years
- High wear resistance, UV resistance, aging resistance, corrosion resistance
- Low temperature resistant, soft and elastic in winter, not hard to use as usual
- Easy to store and use, installation, flexible operation, high irrigation utilization rate

SPRINKLER

TS01-001





Interface size : G1/2", G3/4 Full or part circle, plastic impulse sprinkler

Pressure : 1.5-3.5bar

Range : 8-12m

Flux : 800-1250L

Materia : POM











SPRINKLER

TS01-002









Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 1.5-3.5bar

Range : 9.5-11m

Flux : 800-1250L

Materia : POM







TOMEEX



SPRINKLER

TS01-003

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 1.5-3.5bar

Range : 8-12m

Flux : 830-1350L

Materia : POM

SPRINKLER

TS01-004

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.0-3.5bar

Range : 8-10m

Flux : 1400-2150L

Materia : Zinc Alloy











SPRINKLER
TS01-005

Interface size : G3/4"Full circle, plastic impulse sprinkler

Pressure : 1.0-3.0bar

Range : 6-10m

Flux : 700-1100L

Materia : POM



SPRINKLER
TS01-006

Interface size : G3/4"Full circle, plastic impulse sprinkler

Pressure : 1.0-3.0bar

Range : 6-10m

Flux : 700-1100L

Materia : POM



SPRINKLER
TS01-007

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 1.5-4.0bar

Range : 10-12m

Flux : 800-1100L

Materia : POM







TOMEEX

SPRINKLER

TS01-008



Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.5-5.0bar

Range : 12-18m

Flux : 1600-2150L

Materia : POM









SPRINKLER

TS01-009

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 1.5-4.0bar

Range : 8-12m

Flux : 800-1200L

Materia : POM





SPRINKLER

TS01-010



Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.5-5.0bar

Range : 12-18m

Flux : 1650-2150L

Materia : POM

SPRINKLER

TS01-011



Interface size : G3/4"Full circle, plastic impulse sprinkler

Pressure : 2.0-3.5bar

Range : 13-16m

Flux : 1800-1250L

Materia : POM









TOMEEX

SPRINKLER

TS01-012



Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.5-5.0bar

Range : 12-18m

Flux : 1650-2150L

Materia : POM







SPRINKLER

TS01-013



Interface size : G3/4"Full circle, plastic impulse sprinkler

Pressure : 2.0-4.0bar

Range : 10-15m

Flux : 1400-2150L

Materia : POM









SPRINKLER

TS01-014

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.5-4.5bar

Range : 13-16m

Flux : 1850-2150L

Materia : POM

SPRINKLER

TS01-015

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 1.5-4.0bar

Range : 12-18m

Flux : 0.3-1.3m^3/h

Materia : POM



SPRINKLER

TS01-016



Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 1.5-4.0bar

Range : 12-18m

Flux: 0.3-1.3m^3/h

Materia:POM

TOMEEX



SPRINKLER

TS01-017

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.0-5.0bar

Range : 12-20m

Flux : 4.5-6.2m³/h

Materia : POM

SPRINKLER

TS01-018

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.0-4.5bar

Range : 10-14m

Flux : 900-1400L

Materia : POM







SPRINKLER

TS01-019

Interface size : G1/2" Full or part circle, plastic impulse sprinkler

Pressure : 2.0-4.5bar

Range : 12-18m

Flux : 1800-2300L

Materia : POM

SPRINKLER

TS01-020



Interface size : G3/4" Full circle, plastic impulse sprinkler

Pressure : 1.5-3.5bar

Range : 13-16m

Flux : 1400-1900L

Materia : POM







SPRINKLER

TS01-021

Interface size : G3/4" Full circle, plastic impulse sprinkler

Pressure : 2.5-5.0bar

Range : 10-14m

Flux : 1100-1800L

Materia : POM

SPRINKLER

TS01-022

Interface size : G3/4" Full circle, plastic impulse sprinkler

Pressure : 2.0-4.0bar

Range : 13-19m

Flux : 2100-2800L

Materia : POM



TOMEEX



SPRINKLER

TS01-023

Interface size : G3/4" Full circle, G3/4"plastic impulse sprinkler

Pressure : 3.0-5.0bar

Range : 13-19m

Flux : 2100-2800L

Materia : POM+PP





SPRINKLER

TS01-024

Interface size : G3/4" Full circle, plastic impulse sprinkler

Pressure : 3.0-5.0bar

Range : 13-19m

Flux : 2100-2800L

Materia : POM+PP







SPRINKLER

TS01-025

Interface size : G1" Full circle, plastic impulse sprinkler

Pressure : 3.0-5.0bar

Range : 13-20m

Flux : 2100-2800L

Materia : POM+PP



SPRINKLER

TS01-026



Interface size : G1" Full circle, plastic impulse sprinkler

Pressure : 3.0-5.0bar

Range : 13-20m

Flux : 210 -2800L

Materia : POM+PP



SPRINKLER

TS01-027

Interface size : G1½" Full circle, plastic impulse sprinkler

Pressure : 3.0-5.5bar

Range : 18-30m

Flux :6000-10000L

Materia : POM+PP





TOMEEX



TS0301401



TS0301402



TS0301403



TS0301401



TS03014



TS03015



TS00016



TS03017





TS02-036



TS02-038



TS02-042







TS02-039





TS02-113



TS02-115



TS02-118





TS02-119



TS02-120



TS02-121



TS02-122



TS02-123

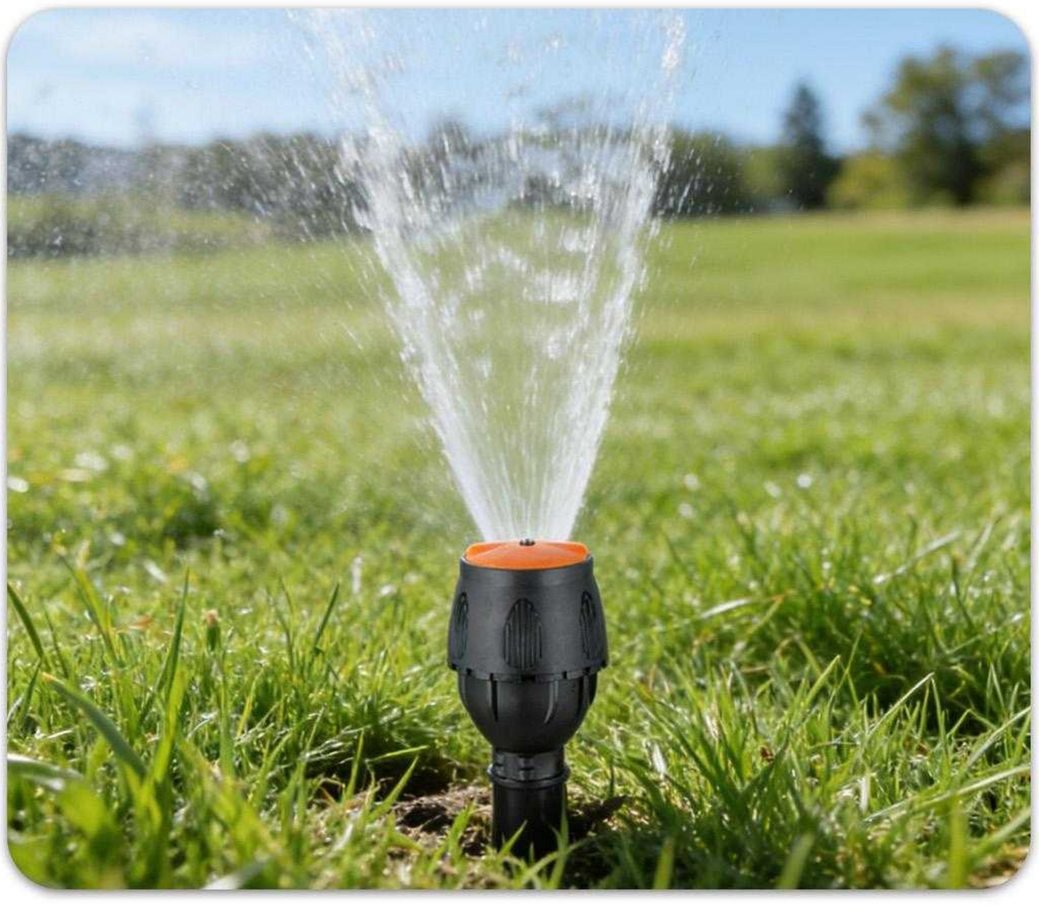



TOMEEX



TS03052



TS03055



TS03062



TS03062





DRIPPERS



TS03-046



TS03-047



TS03-048



TS03-049



TS03-054



TS03051



TS03060



TS03061



TS03063



TS03063



TOMEEX

POP-UP SPRAYERS SERIES

PE1105

There are 3 / 5, 4 / 7 and 8 / 11 special tubes for dropping arrows. The structure of labyrinth long channel arrow handle; diaphragm type steady flow emitter, double guarantee, ensure the uniform outflow of water, unique diversion disc, infiltration irrigation; single arrow, double arrow, four arrows, etc. are randomly combined, which is convenient for construction; it is an appropriate irrigator for potted flowers, potted plants, seedlings and other crops.











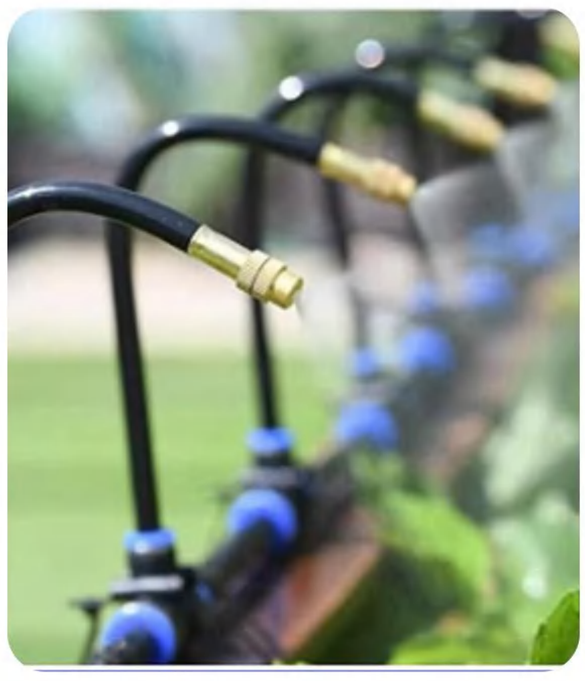



FEATURES

- It has strong adaptability to the change of water pressure.
- The flow rate is smaller without loss of resistance performance.
- The irrigation is even and the uniformity can reach 85-95%.
- The drop arrow is connected with the capillary socket, and the socket fits closely, and the arrow is not easy to fall off.
- High water and fertilizer utilization rate, reduce environmental pollution, water evaporation, reduce air humidity, reduce disease and insect pests.
- Easy to install and use.
- Water saving efficiency is high, water saving is 50 ~ 70% compared with manual irrigation, and the operation cost is low.



φ3/5mm φ4/7mm

TS03103



φ3/5x4/7mm

TS03104



φ3/5mm φ4/7mm
φ7.5mm ID:φ6.0mm

TS03105



φ4/7xM5.2mm

TS03106



φ4/7mmx1/2"M

TS03107



φ6.0xM5.2mm

TS03108



φ4/7mm

TS03109



φ4/7mm

TS03110



φ4/7mm

TS03111



φ4/7mm

TS03112



φ3/5mm

TS03113



φ4/7mm

TS03114



φ6.0mm

TS03115



φ6.0mm

TS03116



φ6.0mm

TS03117



φ6.0mm

TS03118



φ3/5mm
φ4/7mm

TS03119



φ6.0x6.0mm
φ7.5x6.0mm

TS03120



φ4.2mmx3/5
φ5.0mmx3/5

TS03121



φ4.2mmx3/5
φ5.0mmx3/5

TS03122



φ4.2mmx3/5
φ5.0mmx3/5

TS03123



φ4.2mmx3/5
φ5.0mmx3/5

TS03124



φ4/7mm

TS03125



φ4/7mm

TS03126

TOMEEX



Stack
TS03003-1



Stack
TS03003-2

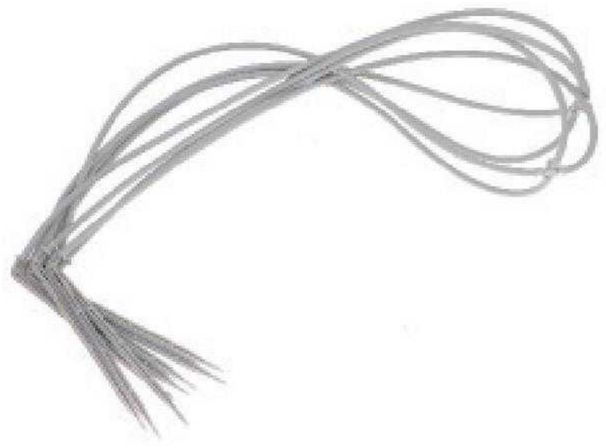

Stack
TS03003-4

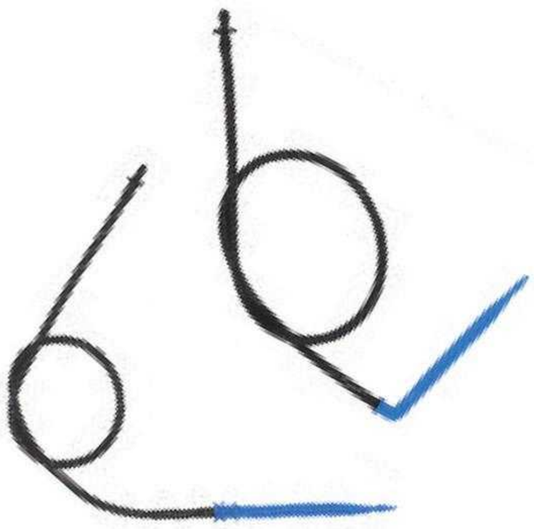

Stack
TS03003-5

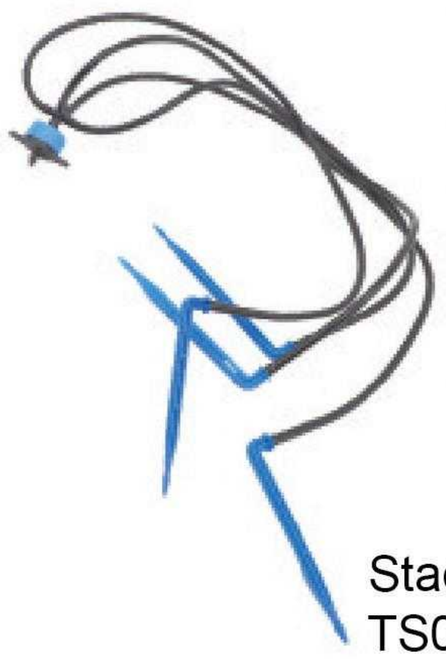

Stack
TS03003-6



Stack
TS03003-7





TS031051602



TS03010

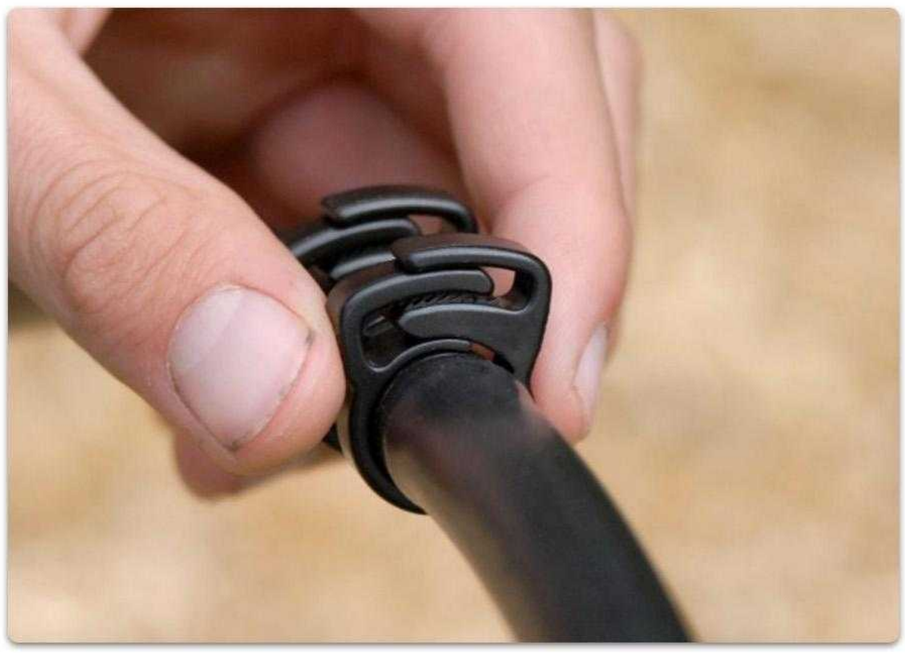



Stack
TS03003



Stack
TS03004



Stack
TS03005

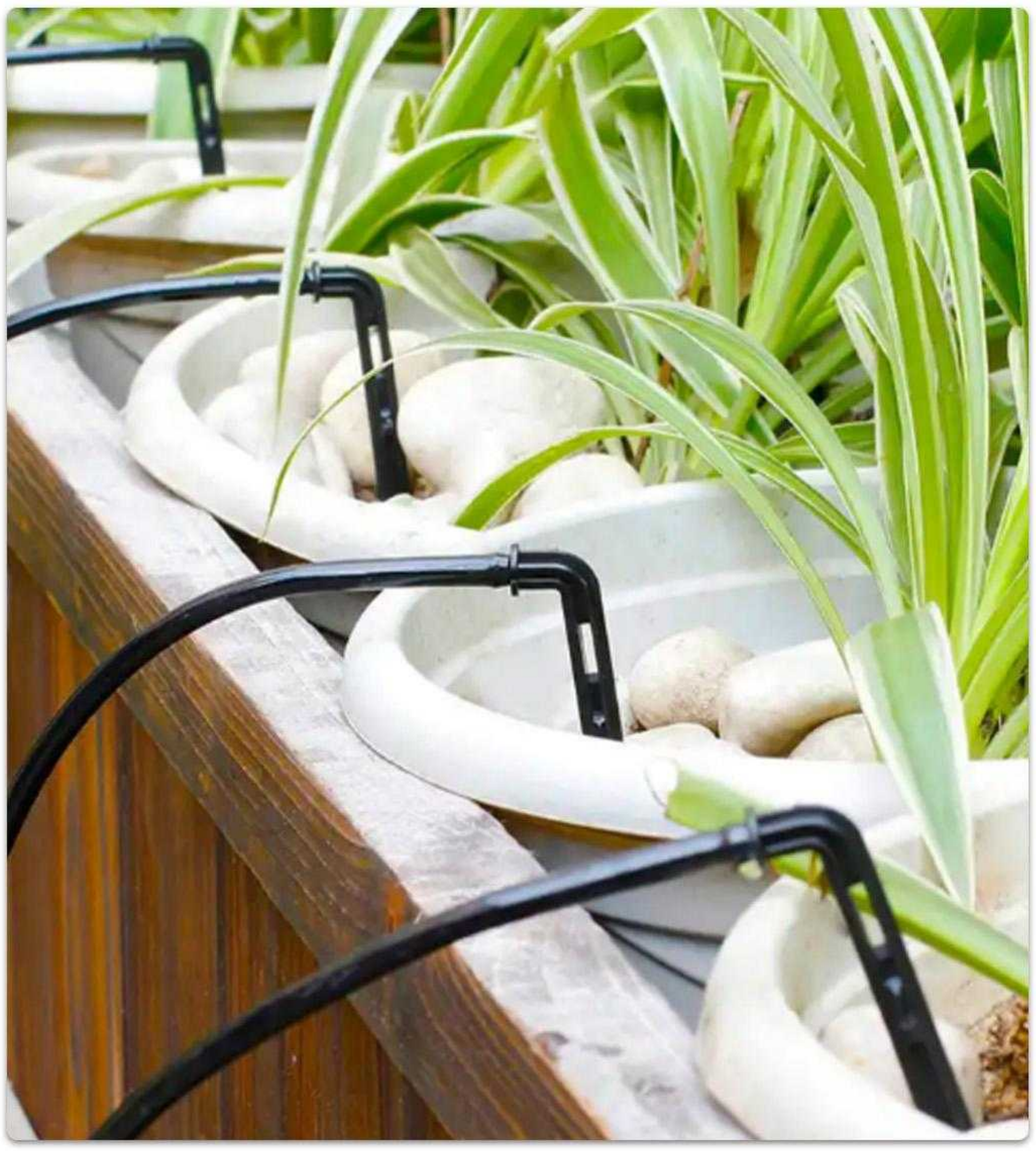



TOMEEX



TS0302001

Caliber：1.8mm
WorkingPressure: 150/200/250/300Kpa
Flow: 105/121/135/148m
OnGroundRadius: 4.0/4.3/4.5/5.0m



TS0302002

Caliber：1.6mm
WorkingPressure: 150/200/250/300Kpa
Flow: 67/79/89/97m
OnGroundRadius: 3.5/3.5/4.0/4.5m



TS0302003

Caliber：1.4mm
WorkingPressure: 150/200/250/300Kpa
Flow: 129/150/167/183m
OnGroundRadius: 3.8/4.0/4.3/4.8m



TS0302004

Caliber：1.0mm
WorkingPressure: 150/200/250/300Kpa
Flow: 35/40/45/49m
OnGroundRadius: 3.5/3.8/4.2/4.5m



TS0302101



TS0302102



TS0302103



TS0302104



TS0302105



TS0302106



TS0302107



TS0302108

Working Pressure/(Kpa)	Red Nozzle	Blue Nozzle	Green Nozzle
150Kpa	72.2L/h3.0m	36.7L/h3.0m	53.9L/h 3.0m
200Kpa	86.1L/h3.0m	43.9L/h3.0m	64.4L/h 3.0m
250Kpa	98.3L/h3.0m	50.0L/h3.0m	73.9L/h 3.0m
300Kpa	109.7L/h3.0m	55.6L/h3.0m	81.7L/h 3.0m



SPRINKLERS



TS0302201

Spraying Radius : 2.8-5.0m

Working Pressure : 1.0-3.0bar

Flow : 25-300L/h



TS0302202

Spraying Radius：2.8-4.0m

Working Pressure ： 1.0-3.0bar

Flow：25-280L/h



TS0302203

Spraying Radius：2.8-4.0m

WorkingPressure：1.0-3.0bar

Flow：25-280L/h



TS0302204

Spraying Radius ： 2.8-6.0m

Working Pressure ： 1.0-3.0bar

Flow：25-400L/h



TS0302205

SprayingRadius：2.8-4.0m

WorkingPressure ： 1.0-3.0bar

Flow：25-280L/h



TS0302206

Spraying Radius ： 2.8-4.0m

Working Pressure ： 1.0-3.0bar

Flow ： 25-280L/h



TS0302207

Spraying Radius ： 2.8-4.0m

Working Pressure ： 1.0-3.0bar

Flow：25-280L/h



TS0302208

Spraying Radius ： 2.8-4.5m

Working Pressure ： 1.0-3.0bar

Flow ： 25-400L/h





TS0302209



TS0302210



TS0302211



TS0302212



TS0302301



TS0302302



TS0302303



TS0302304



TS03024



TS03025





IRRIGATION SETS



TS0300564



TS0300565



TS0300565



TOMEEX



Spec:**20cm** Spec:**30cm** Spec:**30cm** Spec:**40cm** Spec:**50cm** Spec:**60cm**



OPEN 打开
CLOSE 关闭







稳固耐用
不易脱落



IRRIGATION SETS









FILTERS & AIR VALVES



TS0312.05



TS0312.06



TS0312.07



TS0312.08



TS0312.09



TS0312.10



TS0312.11



TS0312.12



TS0312.13



TS0312.14



TS0312.15



TS0312.16



TS0312.17





TOMEEX



TS04-015

3/4"

1"



TS04-016

3/4"



TS04-017

3/4"

1"



TS04-018

1"



TS0326.01

Spec：6"

BottomDiam：205mm

High：230mm

Top：160mm



TS0326.02

Spec：10"

BottomDiam：330mm

High：260mm

Top：254mm



TS0326.03

Spec：12"

BottomDiam：535X400mm

High：335mm

Top：435X300mm



TS0326.04

Spec：14"

BottomDiam：665X495mm

High：335mm

Top：555X395mm









M61



M62



M63



M64



M65



M66



M67



M68

PE FITTINGS



TS06-002

3/5mm
4/7mm



TS06-003

4mm/8mm



TS06-004

3mm



TS06-005

16mm/20mm/25mm



TS06-006

4mm



TS06-007

8mm/10mm



TS06-009

14mm/16mm
20mm/25mm/32mm



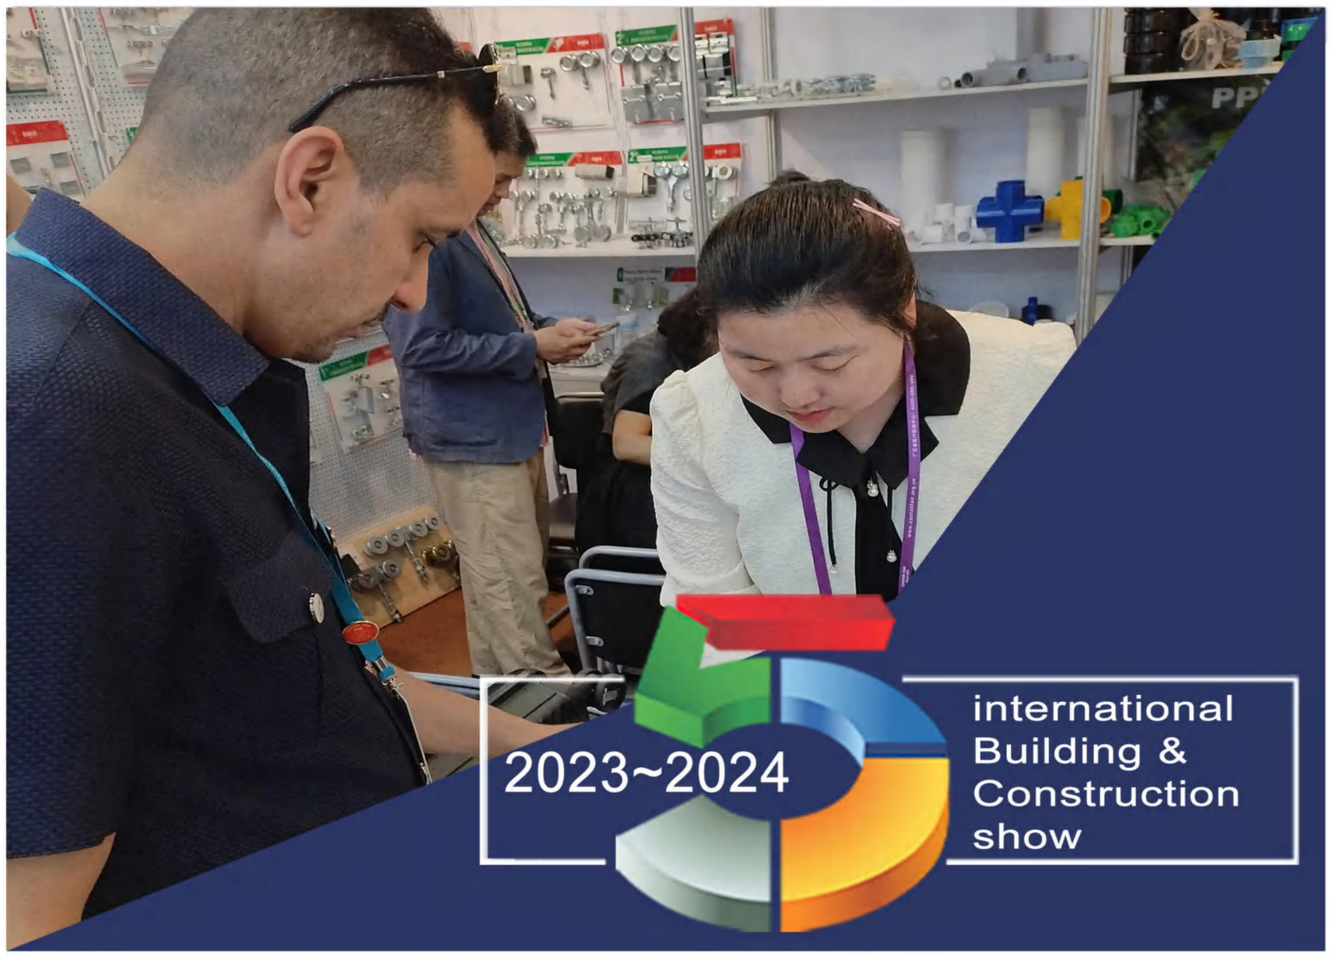



The 134th Canton Fair in 2023
The 135th Canton Fair in 2024
The 136th Canton Fair in 2024





2013 0ctober,EXPO CIHAC at Mexico.



2016May,Natinal Hardware Show inLas Vegas,USA



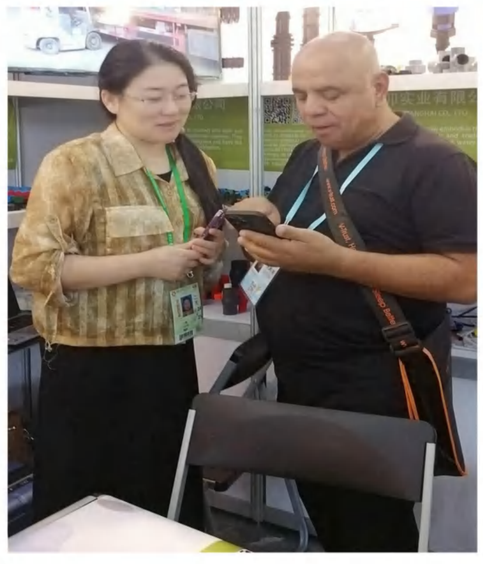



2019 September,Drinktr Fair in Munich,Germany







TOMMURINDUSTRY SHANGHAICO.,LTD

上海天卯实业有限公司

Address: No.123,shenmei Rd.Pudong District,shanghai china

Tel:86-21-20986526 Http://www.tommur.com

Fax:86-21-20986527 Email:contact@tomeex.com

Mob:86-18016050068 Wechat/whatsapp:86-18016050068

Facebook:TomeexPlumbingSystem Linkedin:Tommur Industry Shanghai Co.,LTD

Facebook

Linkedin

WhatsAPP

Wechat